






# QUICK START GUIDE

for connecting the M2 Dash Camera via the MotorOne M2 App with iPhone or iPad

## iOS (Apple) instructions

### Step 1

Search and download the MotorOne M2 App from the App Store.

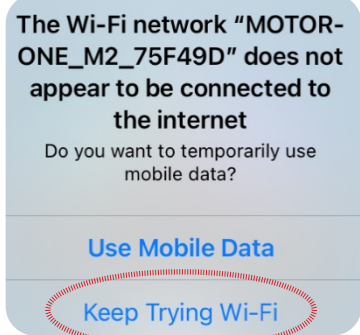


### Step 2

Once installed, close the app store. Now ensure the vehicle ignition is 'on' and have your engine running whilst proceeding with this setup.


### Step 3

Navigate to the phone settings and turn on Wi-Fi. In the Wi-Fi list, select the name that starts with MOTOR-ONE\_M2\_XXXXXX. Enter password: **motoronedc**

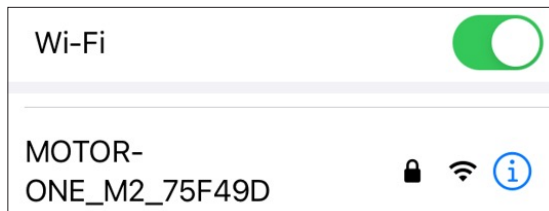

### Step 4

Press the Wi-fi registration button on the M2 camera. You will hear a voice notification: "standby for the registration of device".



### Step 5

Open the MotorOne M2 app on your iOS device and the device will automatically connect to the dash camera. Once connected, you can access, save or send footage.

### Step 6

Once setup is complete, ensure the Wi-Fi connection is disconnected and forgotten.

## Troubleshooting

- If this message pops up on your phone's screen, select 'Keep Trying Wi-Fi'
- If you are having trouble connecting to the app, first check that your location settings are enabled and then try re-starting the phone.

## Important Notes:

If the SD card needs to be removed from or reinserted into the device, ensure dash camera is powered off first.

- Some essential settings are pre-set prior to, or during installation such as time zone and low voltage cut-off. Please refer to your reseller for details.
- Your M2 dash camera will provide you with the following voice notifications:

Voice Notification	Explanation
Records in parking mode	Key off – camera will begin parking mode
Driving mode to start recording. Safe driving	Key on – camera will begin driving mode.
Impact occurred during parking	Impact has been sensed during parking mode. This could be an impact to the vehicle or from the vehicle's door being closed.
System shut down to protect the battery	Car parked. Camera will automatically turn off after voltage drops below set value.

Please refer to your User Manual for more in depth information.

**FOR FURTHER SUPPORT CALL (08) 6267 5167 (AWST)**

